


[COALESCE]

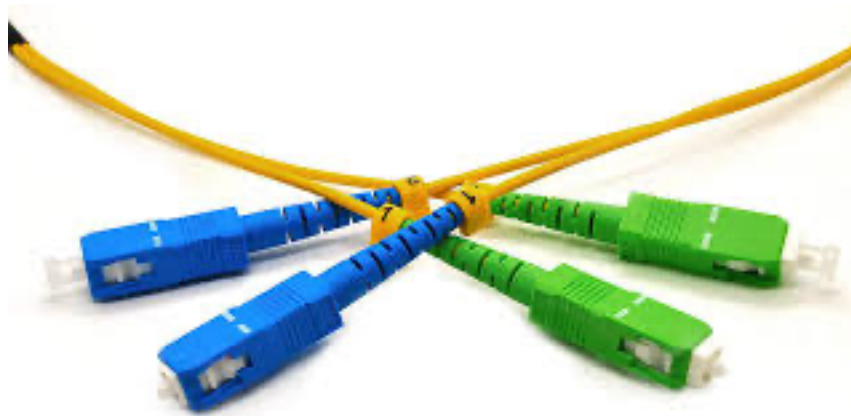

fiber optic patchcord

COALESCE FIBER OPTIC PATCH CORD

Coalesce brand of fiber cable assemblies are designed and manufactured in ISO9001 registered OEM facility . The product range covers both single mode and multimode patch cords and pigtail's ,which are fully qualified to RoHS standards.

Coalesce Assemblies are available in all major fiber optic connector types; a range of cable color options available

Features:

Low insertion loss, high return loss
High environmental stability
Available fiber cable diameters: $\Phi 0.9$, $\Phi 2.0$, $\Phi 3.0$ mm
Simplex, duplex or multi-fiber
Connector Types: LC, FC, SC, ST
Fiber cores: Simplex, Duplex, 4 fibers, 6 fibers, 8 fibers, 12 fibers, 24 fibers, 48 fibers etc.
Fiber Mode: Singlemode (G.652), Multimode (OM1/OM2/OM3/OM4)
Ferrule Interface Type: UPC to UPC, APC to APC, APC to UPC
High temperature stability
Compliant to IEC, TIA/EIA, NTT and JIS specifications

Application :

Fiber optic Assembly House
Structured Cabling System
Datacenter

Specifications

Connector Type : LC , FC , SC , ST

Insertion Loss (db) . : ≤ 0.25

Return Loss (db) : ≥ 50

Durability (Times) : ≥ 600

Tensile Strength (N) : ≥ 55

Working Temp ($^{\circ}$ C) : -25 to + 75

Length. : 1 / 3 meter

Ordering Information :

Connector Type

Fiber Cores (Simplex , Duplex.)

Fiber Mode (Single / Multimode)

Ferrule Type

Length

1 Year Warranty

Under Warranty Call Lock thru Email and SMS

Easy Warranty renewals options

Dedicated Support Team for Troubleshooting

To Re-engineer , Re-invent and Realize your structured cabling plans pls talk to

sales@discreet.co.in